

# E40 Series

## Diameter $\phi$ 40mm Shaft type/Hollow type/Built-in type Incremental Rotary encoder

### ■ Features

- 12-24VDC power supply of line driver output (Line-up)
- Easy installation at narrow space
- Small moment of inertia
- Power supply : 5VDC, 12-24VDC  $\pm$ 5%
- Various output types

**⚠ Please read "Caution for your safety" in operation manual before using.**



### ■ Ordering information

**E40** **H** **8** **5000** **3** **N** **24**

Series	Shaft type	Hollow type	Pulse/1 Revolution	Output phase	Output	Power supply	Cable
S: Shaft type H: Hollow type HB: Hollow built-in type	External Inner	6: $\phi$ 6mm 8: $\phi$ 8mm 10: $\phi$ 10mm 12: $\phi$ 12mm	Refer to resolution	2: A, B 3: A, B, Z 4: A, $\bar{A}$ , B, $\bar{B}$ 6: A, $\bar{A}$ , B, $\bar{B}$ , Z, $\bar{Z}$	T: Totem pole output N: NPN open collector output V: Voltage output L: Line driver output	5 : 5VDC $\pm$ 5% 24: 12-24VDC $\pm$ 5%	Blank: Normal type (*) C: Cable outgoing connector type

\* Standard : E40S6-[PULSE]-3-N-24  
E40H8-[PULSE]-3-N-24  
E40HB8-[PULSE]-3-N-24

\* Standard: A, B, Z

\* Cable length : 250mm

### ■ Specifications

Item	Diameter $\phi$ 40mm shaft/hollow shaft/hollow built-in type of incremental rotary encoder		
Resolution(P/R)	<b>(Note1)</b> *1, *2, *5, 10, *12, 15, 20, 23, 25, 30, 35, 40, 45, 50, 60, 75, 100, 120, 150, 192, 200, 240, 250, 256, 300, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 1500, 1800, 2000, 2048, 2500, 3000, 3600, 5000 (Not indicated resolution is customizable.)		
Electrical specification	Output phase	A, B, Z phase (Line driver : A, $\bar{A}$ , B, $\bar{B}$ , Z, $\bar{Z}$ phase)	
	Phase difference of output	Phase difference between A and B : $\frac{T}{4} \pm \frac{T}{8}$ (T=1 cycle of A phase)	
	Control output	Totem pole output	• Low $\Rightarrow$ Load current: Max. 30mA, Residual voltage : Max. 0.4VDC • High $\Rightarrow$ Load current: Max. 10mA, Output voltage (Power supply 5VDC): Min. (Power supply -2.0)VDC, Output voltage (Power supply 12-24VDC): Min. (Power supply -3.0)VDC
		NPN open collector output	Load current : Max. 30mA, Residual voltage : Max. 0.4VDC
		Voltage output	Load current : Max. 10mA, Residual voltage : Max. 0.4VDC
		Line driver output	Low $\Rightarrow$ Load current : Max. 20mA, Residual voltage : Max. 0.5VDC High $\Rightarrow$ Load current : Max. -20mA, Output voltage : Min. 2.5VDC
	Response time (Rise/Fall)	Totem pole output	Max. 1 $\mu$ s
		NPN open collector output	Max. 1 $\mu$ s
		Voltage output	Max. 1 $\mu$ s
		Line driver output	Max. 0.5 $\mu$ s
	Max. Response frequency	300kHz	
	Power supply	• 5VDC $\pm$ 5% (Ripple P-P : Max. 5%) • 12-24VDC $\pm$ 5% (Ripple P-P : Max. 5%)	
	Current consumption	Max. 80mA (disconnection of the load), Line driver output : Max. 50mA (disconnection of the load)	
Insulation resistance	Min. 100M $\Omega$ (at 500VDC megger between all terminals and case)		
Dielectric strength	750VAC 50/60Hz for 1 minute (Between all terminals and case)		
Connection	Cable outgoing type, 250mm cable outgoing connector type		
Mechanical specification	Starting torque	Shaft Type : Max. 40gf $\cdot$ cm (0.004N $\cdot$ m), Hole Type : Max. 50gf $\cdot$ cm (0.005N $\cdot$ m)	
	Moment of inertia	Max. 40g $\cdot$ cm <sup>2</sup> ( $4 \times 10^{-6}$ kg $\cdot$ m <sup>2</sup> )	
	Shaft loading	Radial : Max. 2kgf, Thrust : Max. 1kgf	
	Max. allowable revolution	<b>(Note2)</b> 5000rpm	
Vibration	1.5mm amplitude at frequency of 10 to 55Hz in each of X, Y, Z directions for 2 hours		
Shock	Max. 50G		
Ambient temperature	-10 to 70 $^{\circ}$ C (at non-freezing status), Storage : -25 to 85 $^{\circ}$ C		
Ambient humidity	35 to 85%RH, Storage : 35 to 90%RH		
Protection	IP50 (IEC standard)		
Cable	$\phi$ 5mm, 5P, Length : 2m, Shield cable (Line driver output : $\phi$ 5mm, 8P)		
Accessory	• Shaft type : $\phi$ 6mm coupling standard, $\phi$ 8mm coupling (Sold separately) • Hole type : Bracket		
Approval	CE (Except for line driver output)		
Unit weight	Approx. 160g		


\* **(Note1)** '\*' pulse is only for A, B phase (Line Driver output is for A,  $\bar{A}$ , B,  $\bar{B}$  phase)

\* **(Note2)** Max. allowable revolution  $\geq$  Max. response revolution [Max. response revolution (rpm) =  $\frac{\text{Max. response frequency}}{\text{Resolution}} \times 60 \text{ sec.}$ ]

Make sure that max. response revolution should be lower than max. allowable revolution when selecting the resolution.

# Incremental $\phi$ 40mm Shaft/Hollow Shaft/Built-in Type


## Control output diagram

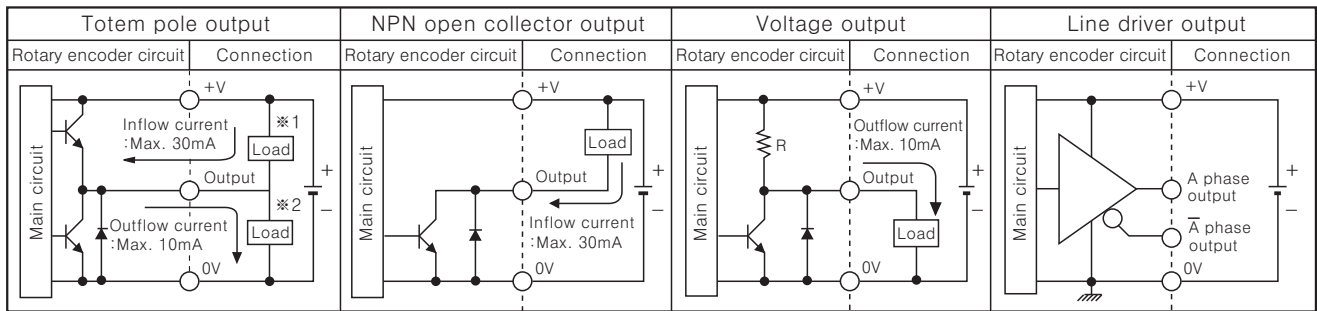


- Totem pole output type can be used for NPN open collector output type (\*1) or Voltage output type (\*2).
- All output circuits of A, B, Z phase are the same. (Line driver output is A,  $\bar{A}$ , B,  $\bar{B}$ , Z,  $\bar{Z}$ )

## Output waveform

- Totem pole output / NPN open collector output / Voltage output
- Line driver output

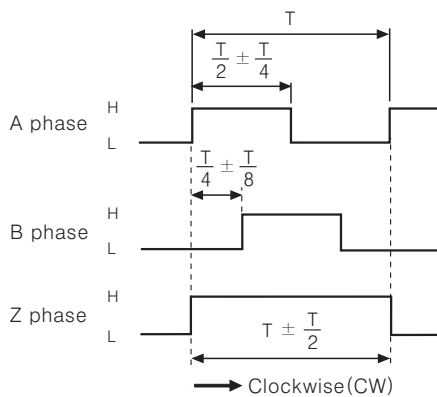


※ CW : Right turn as from the shaft

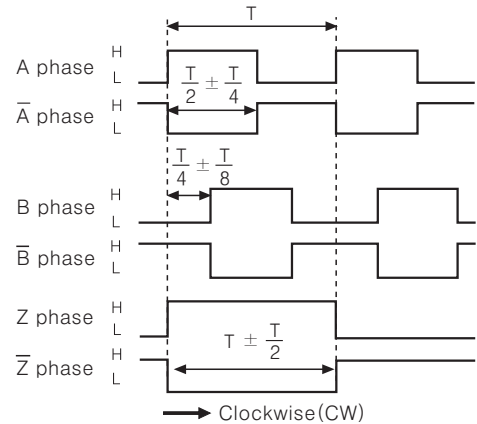

## Connections


### Normal type

- Totem pole output / NPN open collector output / Voltage output

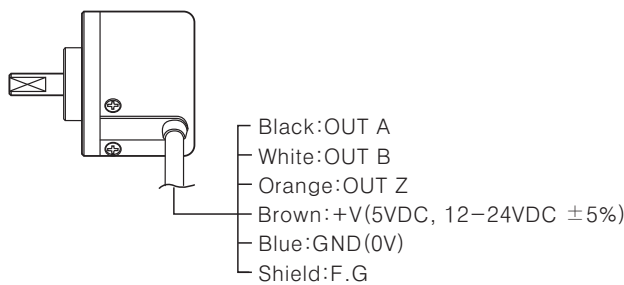


- ※ Unused wires must be insulated.
- ※ The metal case and shield wire of encoder should be grounded (F.G).

### Line driver output

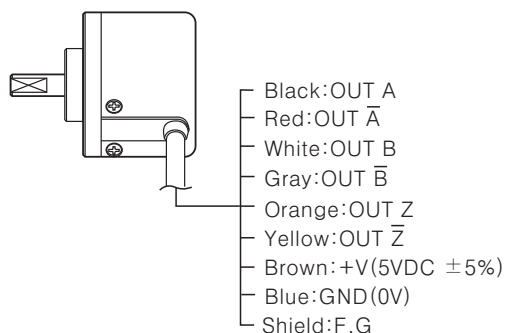

### Cable outgoing connector type

- Totem pole output
- Line driver output
- NPN open collector output
- Voltage output



Totem pole output NPN open collector output Voltage output			Line driver output		
Pin No	Function	Cable color	Pin No	Function	Cable color
①	OUT A	Black	①	OUT A	Black
②	OUT B	White	②	OUT $\bar{A}$	Red
③	OUT Z	Orange	③	+V	Brown
④	+V	Brown	④	GND	Blue
⑤	GND	Blue	⑤	OUT B	White
⑥	F.G	Shield	⑥	OUT $\bar{B}$	Gray
			⑦	OUT Z	Orange
			⑧	OUT $\bar{Z}$	Yellow
			⑨	F.G	Shield

※ F.G (Field Ground): It should be grounded separately.

(A) Photo electric sensor

(B) Fiber optic sensor

(C) Door/Area sensor

(D) Proximity sensor

(E) Pressure sensor

(F) Rotary encoder

(G) Connector/Socket

(H) Temp. controller

(I) SSR/Power controller

(J) Counter

(K) Timer

(L) Panel meter

(M) Tacho/Speed/Pulse meter

(N) Display unit

(O) Sensor controller

(P) Switching power supply

(Q) Stepping motor & Driver & Controller

(R) Graphic/Logic panel

(S) Field network device

(T) Production stoppage models & replacement


# E40 Series

## Dimensions


### Normal type

#### ● Shaft type


(Unit:mm)

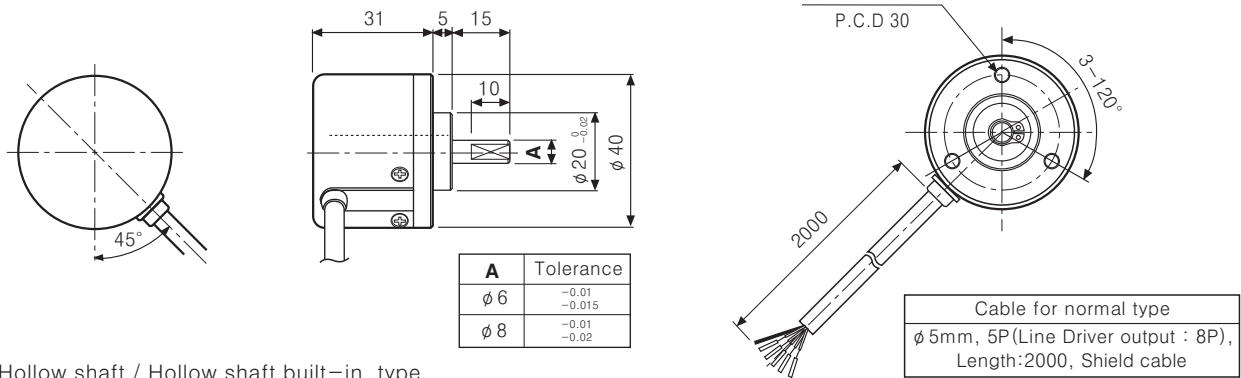


#### ● Hollow shaft / Hollow shaft built-in type

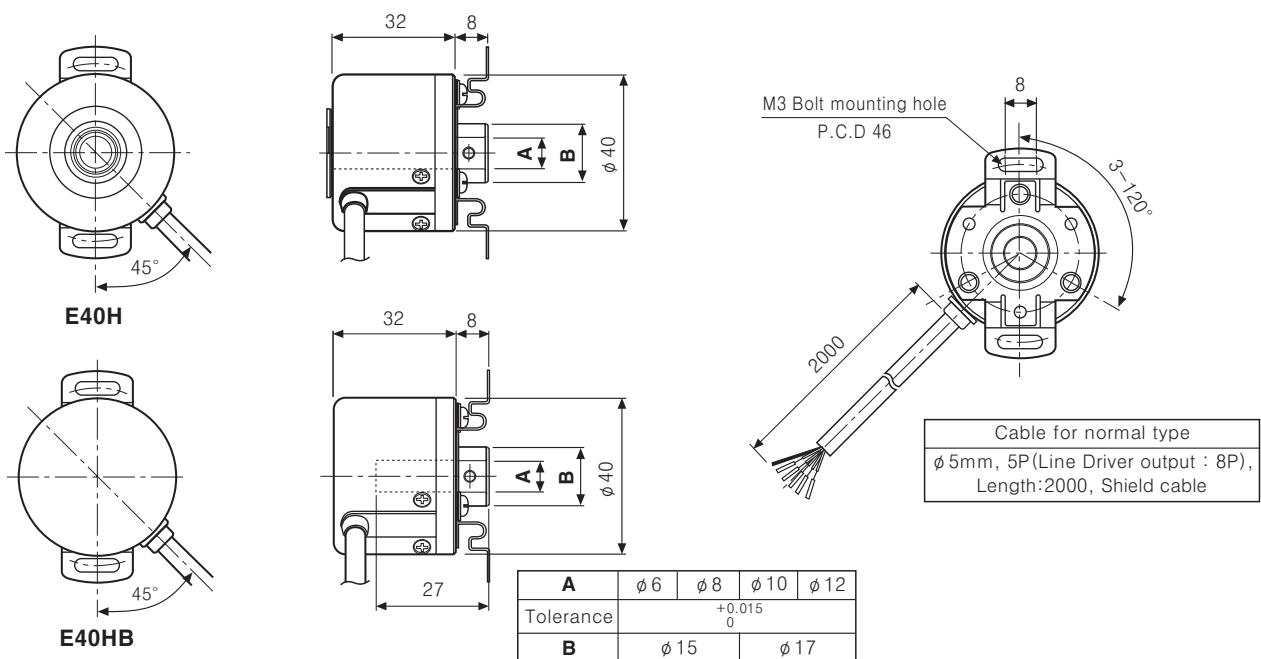

### ■ Cable outgoing connector type

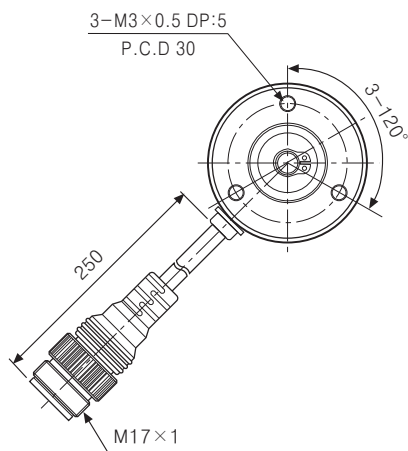


#### ◎ Bracket (E40H, E40HB)

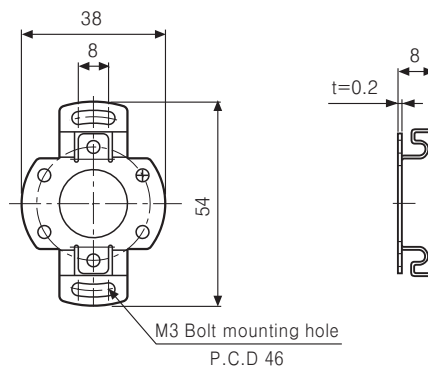


#### ◎ Coupling (E40S)

##### ● φ 6 Coupling

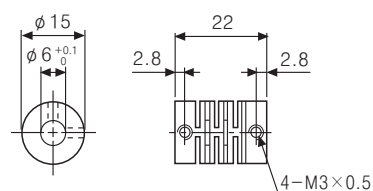

##### ● φ 8 Coupling

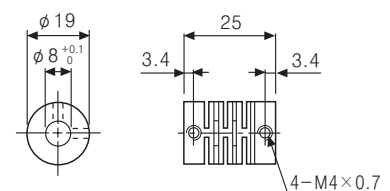

\*Connector cable is customizable and see G-6 for specifications.